



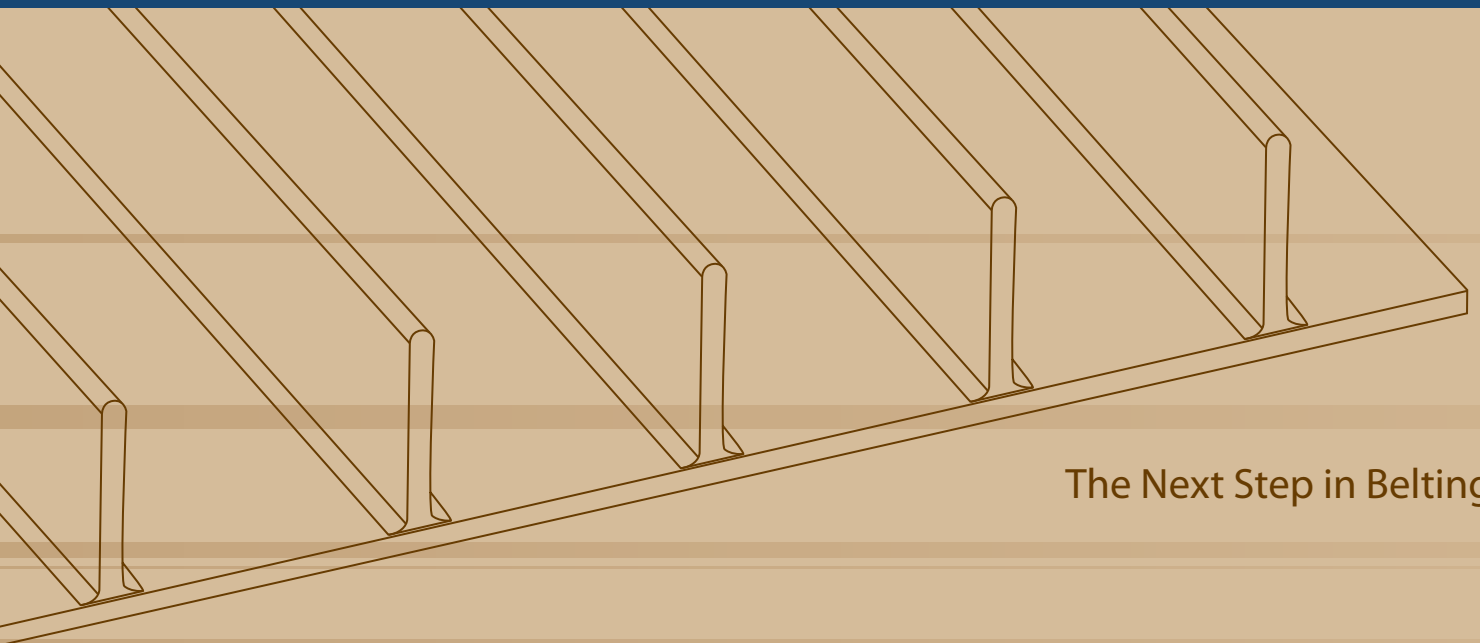

Special T-Cleats

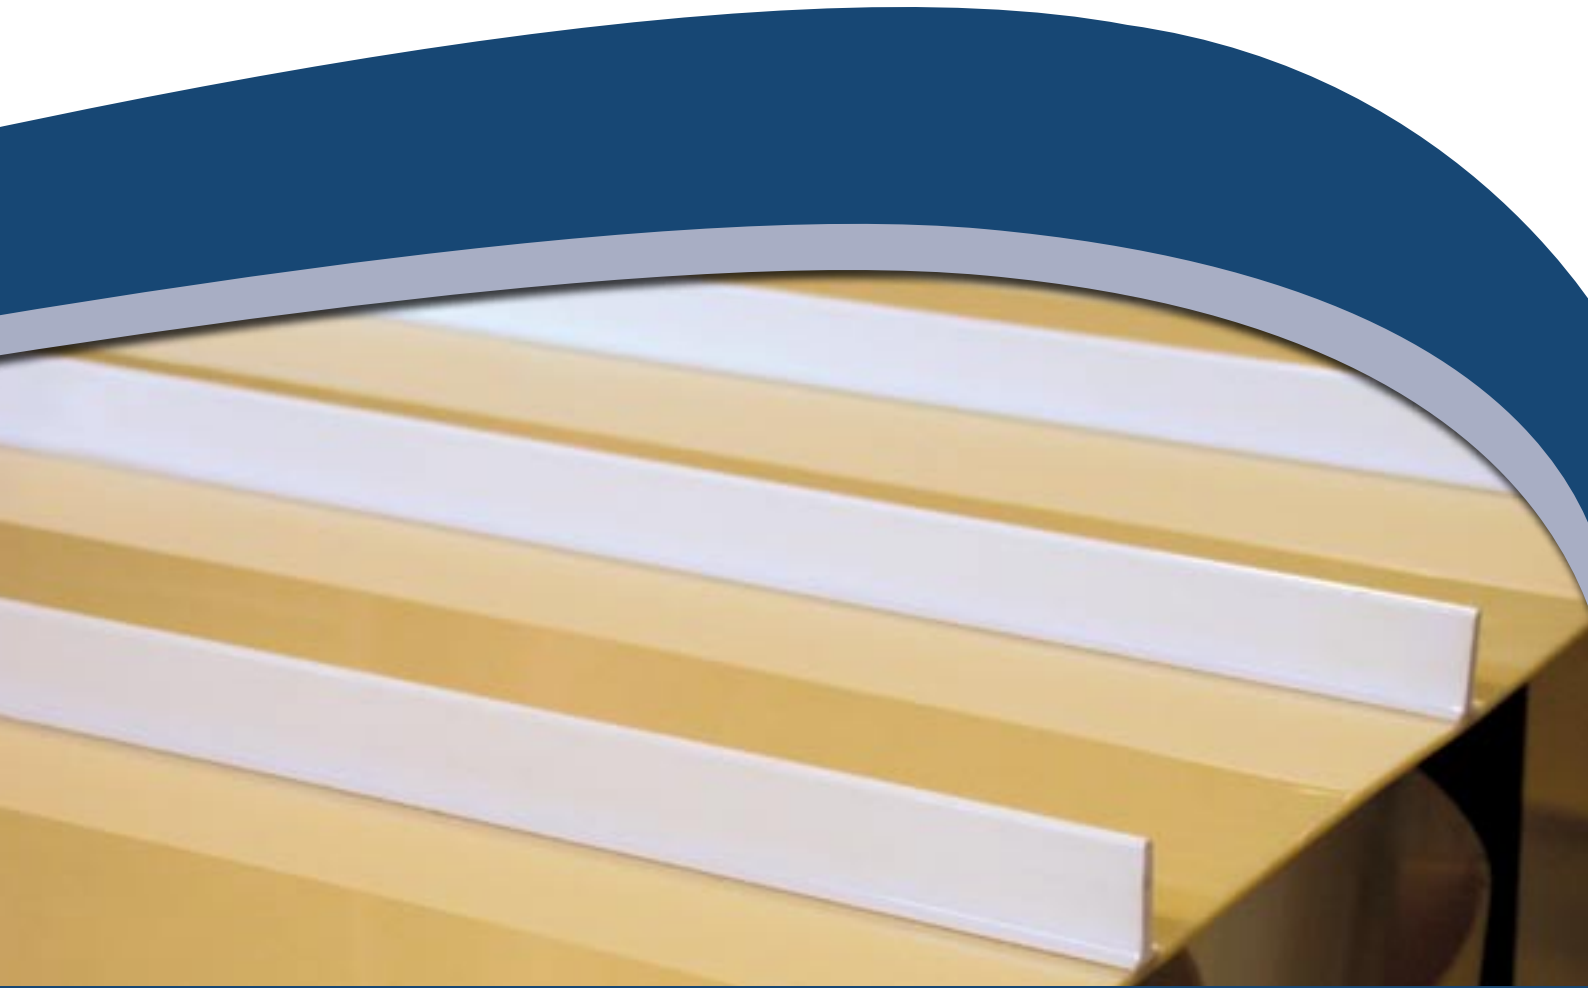

The Next Step in Belting

T-CLEATS

VOLTA Belting now produces a line of cleats with a flanged bottom to provide a mechanically sturdy, hygienically clean cleat. The T-Cleat is manufactured using VOLTA material and meets our highest quality standards. VOLTA T-Cleats are suitable for use on all VOLTA 'M' material family belts and are FDA/USDA certified for food contact applications.


T-Cleats can be welded with High-Frequency welders, or with a Hot Air Gun. For additional information concerning welding of cleats contact your local VOLTA Belting distributor.

The Structure of the T-Cleat provides:


- a solid mechanical base which strengthens the cleat against longitudinal forces. In many applications the weight of the conveyed product will press against the cleat causing it to separate from the belt. Our T-Cleat, welded onto a homogeneous VOLTA conveyor belt provides an almost unbreakable fabrication.
- a very smooth transition from the belt to the cleat. This eliminates sharp corners and crevices that provide nesting places for bacteria and microbes. This hygienic feature is especially important when transporting ground or grated products that tend to become wedged in sharp corners left by traditional cleats.

VOLTA T-Cleats are supplied in standard cardboard cartons. Each carton contains 20 x 3m long rods.

For additional information about available cleat dimensions and colors other than those listed in the table, please contact your local VOLTA Belting distributor or email us at: sales@voltabelting.com.

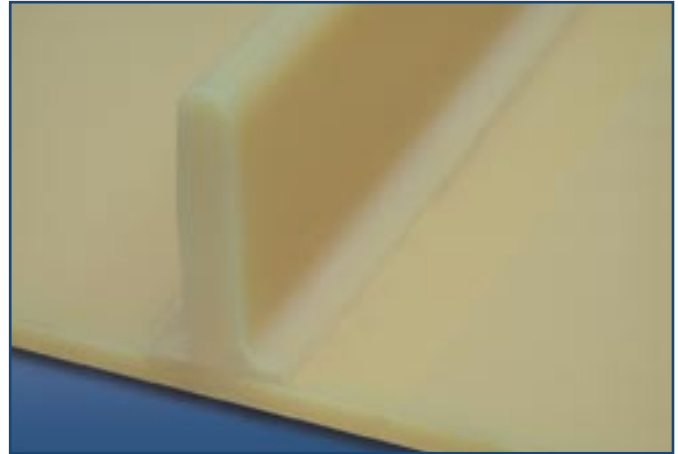

VOLTA T-cleat welded on Flat belt

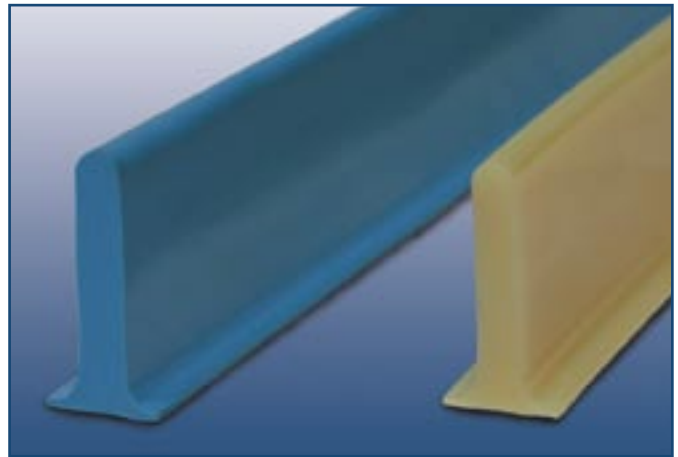

CTMB (left) and CTMW (right) T-cleats

Product	Color	Shore hardness	Cleat height (mm)	Standard packaging
CTMW	beige	90A /40D	25, 30, 40, 50	20 rods per carton, 3 m (10') long
CTMB	blue		25, 30, 40, 50	
CTW	white		25	



VOLTA Belting Technology Ltd.

MAIN OFFICE (ISRAEL)

Tel: +972-4-995-1333
Fax: +972-4-995-1366

USA

Tel: +1-973-276-7905
Fax: +1-973-276-7908
Tol Free: 1-877-VOLTAUS

EUROPE

Tel: +31-33-495-1800
Fax: +31-33-495-1812

www.voltabelting.com - e-mail: sales@voltabelting.com